



# HOW TO INSTALL MAXIMUM VENTILATORS ON METAL ROOF

## SIX STEPS FOR EASY INSTALLATION



STEP 1



Determine the location of the unit to be installed on roof.  
Inspect the attic to determine the location of the rafters, and centre the hole between the rafters.  
Position the flashing so that the flange slides under the ridge cap.

STEP 2




Using a piece of chalk or pencil, trace around the interior of the flashing.  
Make sure that is perfectly parallel to the peak of the roof.

STEP 3



Use a drill to pierce a hole in the roof, enabling the insertion of a jig-saw blade and cut the metal.

STEP 4

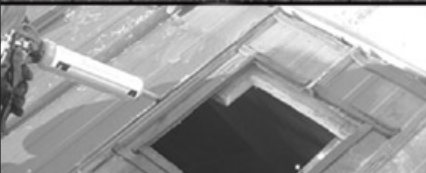

Install a closer gasket foam sealer around the perimeter of the hole.  
Install a bead of caulking onto both sides of the ribs where the flashing will be sitting.

STEP 5



Secure flashing onto roof with metal screws making sure the throat of the flashing is centered with the hole.  
Apply a generous amount of caulking on top and bottom of flashing to fill up gap between the roof and flange.

STEP 6



Attach the head of the ventilator onto the flashing making sure it is level.  
Secure with the metal screws provided into each of the perforations.



9229, Pierre Bonne  
R.D.P. Montréal, Qc H1E 7J6  
Tel. (514) 648-8011 Fax: (514) 648-9129  
1-800-665-4874  
[www.ventilation-maximum.com](http://www.ventilation-maximum.com)