




HOW TO INSTALL THE MULTIPLE EXHAUST TRAP

SIX STEPS FOR EASY INSTALLATION

STEP 1

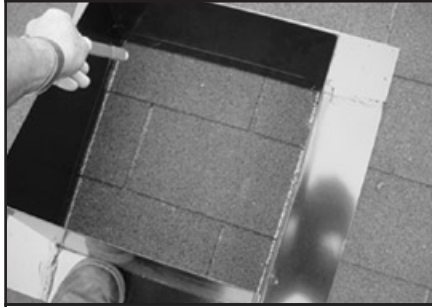

Determine the location of the exhaust vent, (no lower than 5 ft. from the eaves) and inspect the attic to determine the location of the rafters and centre the hole between the rafters.

Centre the flashing between the two trusses and using a pencil or chalk, trace a line around tile interior of the flashing.

STEP 2




Using a sharp knife, cut away the shingles.

Carefully remove the roofing nails within 6 inches around the perimeter of the hole to enable you to slide the flashing under the shingles.

Using a drill, pierce a 1 1/2 in. hole in each corner of the sheathing to permit insertion of a jigsaw blade.

Using a jigsaw, cut out the sheathing.

STEP 3



Apply a good quality sealant over the perimeter of the underside of the flange.

Slide the flange under the shingles over the hole and nail or screw onto sheathing.

Apply a good quality sealant over the back and halfway down both sides over top of flange.

Nail shingles into place and install a bead of caulking around flange




STEP 4




Take the multi-exhaust vent and install it over the range making sure it is level and screw it onto the base flashing with self tapping screws provided.

STEP 5



Remove screws securing the cover, and remove the cover of the unit.

STEP 6



Using an insulated flexible tubing, install the tubing onto collar and secure with a good quality duct tape.

Overlap plastic barrier over the insulation and push over the tubing and collar, tight against the interior wall of unit. Secure with duct tape.

Drop the other end of the insulated tubing down into the hole and connect to exhaust fan units.

Re-install cover and secure with screws.

N.B. This installation can also be done prior to installing the vent over the flange.